

LED WALL SCONCE

LumPACT

The LumPACT LED Wall Sconce delivers high impactful level of light at nominal wattage to accommodate a broad range of project requirements.

Engineered for quick, straightforward installation, LumPACT combines proven LED performance, efficient thermal management, and durable construction to provide consistent light output and long service life—while maintaining a cost-effective profile ideal for large-scale deployments.

Designed for exterior building and wall-pack applications, LumPACT is well suited for both new construction and retrofit projects. Its adjustable CCT and standardized design makes it a smart, stocking-friendly solution for distributors, ESCOs, and national account programs seeking reliable performance, installation efficiency, and long-term value.



FEATURES

CONSTRUCTION

- Die-Cast aluminum body with corrosion-resistant hardware
- Quickly separate driver from LED module for easy maintenance.
- Standard 4KV Surge Protection
- 0-10v Dimming Driver
- Built in Photocontrol Standard
- 80+ CRI

LISTING

- UL and cUL Listed
- Wet location rating IP65
- DLC Listed
- 5-Year Warranty

HOUSING

- Easy installation with wall mount bracket

FINISH

- UV stabilized powder coated finish
- Bronze Finish standard

LENS

- High impact resistant polycarbonate lens
- Type IV optics standard

OPTIONS

- 10kV Surge Protection

3 CCT ADJUSTABLE
3000K / 4000K / 5000K



SPECIFICATIONS

Lumen Package (LM):	Up to 3570 lumens
Wattage Range (W):	24 watts
Efficacy Range (LPW):	Up to 155 LPW
Product Weight:	1.62LBS(Single) / 19.4LBS(12 pcs)
Carton LBS:	0.39LBS(Inner) / 4.6LBS(Master)

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

ORDERING GUIDE



Series	Wattage	CCT	Distribution
LPT LumPACT	24 24 watts	A 3000/4000/5000K	4 Type IV

Voltage	Mounting	Color	Controls-Options
U Universal 120-277V	WM Wall Mount	BZ Bronze	XS 10kV Surge Protection

OPTIONS



10kV Surge Protection

INSTALLATION

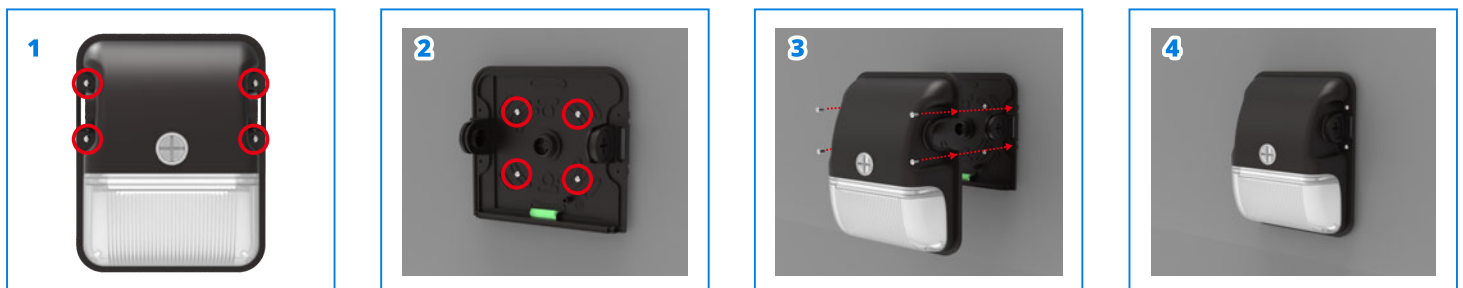


Fig.1: Remove four side screws of luminaire.

Fig.2: Screw through luminaire base and mount to wall.

(Back plate is designed for level installation. Compatible with round, octagonal, and square J-Boxes.)


Fig.3: Fit luminaire housing to base and fasten four screws.

Fig.4: Installation complete.


Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

DISTRIBUTION

ISO illuminance diagram(Lux) of 3000K

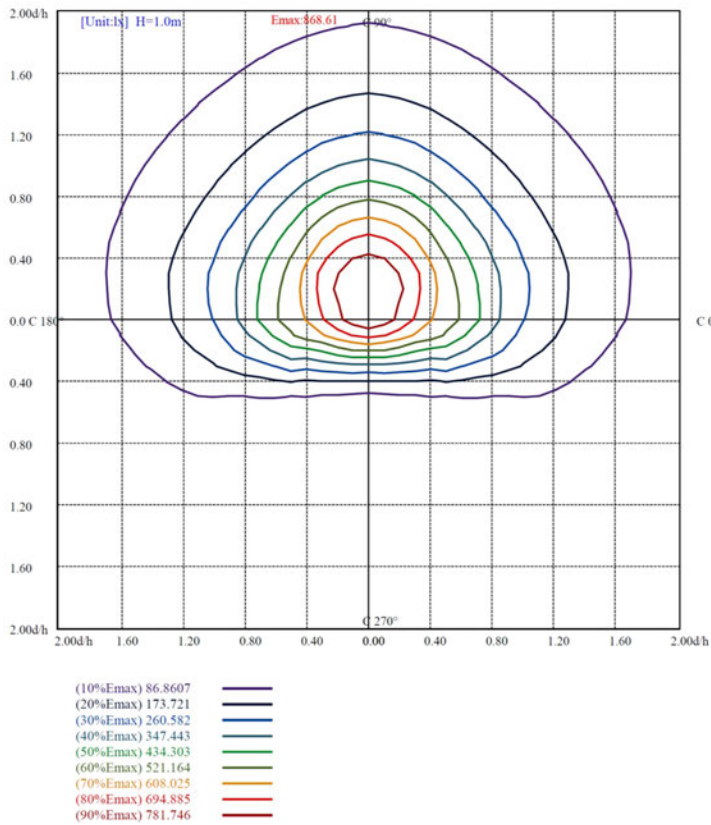

Polar Curves of 3000K

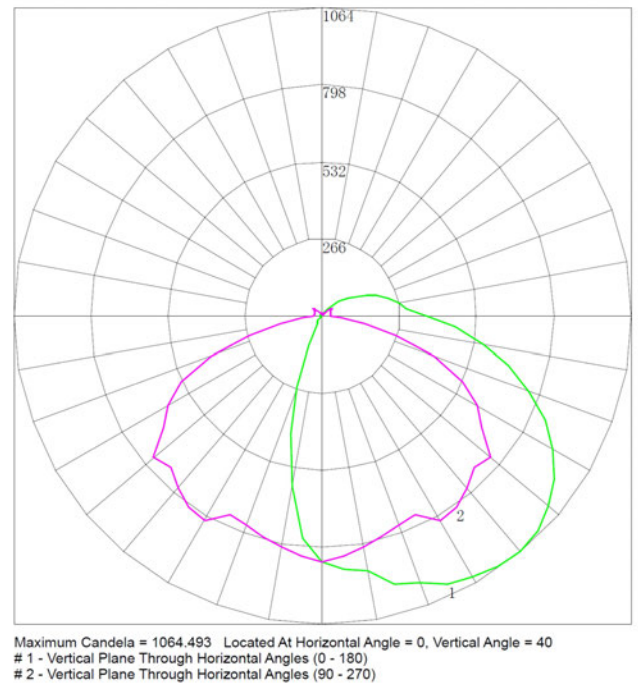

PERFORMANCE DATA

Performance Data			3000K					4000K					5000K				
Lumen Package	Distribution	CRI	Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating			Delivered Lumens	Efficacy (LPW)	BUG Rating		
					B	U	G			B	U	G			B	U	G
24 watts	4 Type IV	80	3123	133	1	3	2	3570	155	1	3	2	3383	144	1	3	2

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
 Call 866-458-6372 for assistance.

LUMEN MAINTENANCE TESTING DATA


LUMINAIRE AMBIENT TEMPERATURE FACTOR(LATF)		
(°C)	Ambient Temp (°F)	Lumen Multiplier
0°C	32°F	/
10°C	50°F	/
20°C	68°F	/
30°C	77°F	100%
40°C	86°F	98%
50°C	104°F	97%

ELECTRICAL DATA


Nominal Wattage	Input Voltage	Current Amps
24 watts	120	0.2
	208	0.12
	240	0.1
	277	0.09
	347	0.07
	480	0.05

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.

DIMENSIONS

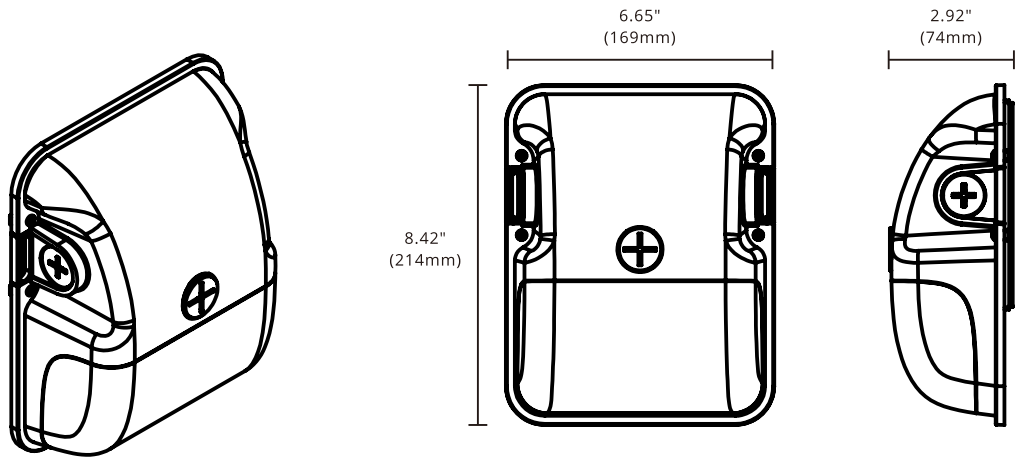

CARTON DIMENSIONS

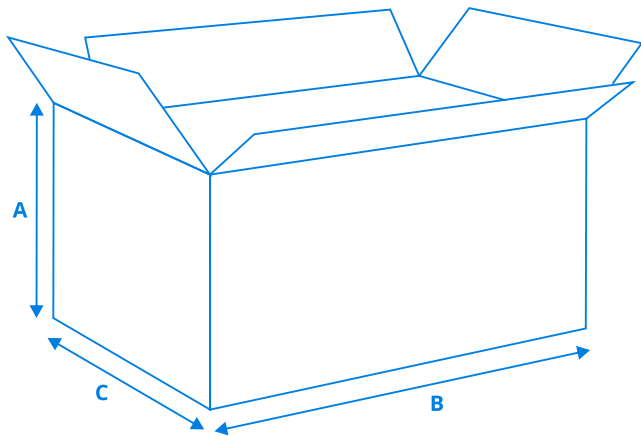

Weights	Inner Carton				Master Carton				
Fixture Size	Inner Carton Weight LBS	Height A	Width B	Depth C	Carton Pack	Master Carton Weight LBS	Height A	Width B	Depth C
24 watts	2.01	4 3/8"	10"	8 1/8"	12pcs/ctn	24	14 1/8"	16 7/8"	10 5/8"

Specialized expertise and focus on ESCOs, national accounts and distributor partnerships
Call 866-458-6372 for assistance.